Challenges in Relating Accelerated Aging Results to Service Life

Nigel Hampton

NEETRAC

October 2011

Most test protocols are based on what is pragmatically possible

Protocols are designed to avoid "known" poor performance

Thus protocols are not designed to

- Distinguish if A is better than B
- Determine if C will last “x” years

The general assumption is that higher strength or longer times are better – how that relates to life is unclear

However, much of the data available to us come from such tests

Some Challenges / Concerns

- Size
  - Length – we can test short lengths but we want to infer performance on long lengths
  - Big vs Small – we can test small cables but we want to infer performance on big cables

Some Challenges / Concerns

- Size
  - Length – we can test short lengths but we want to infer performance on long lengths
  - Big vs Small – we can test small cables but we want to infer performance on big cables
- Relevance
  - Success Criteria – how good an indicator of life is high ACBD values
  - Accelerating Factors – do the factors we use, accelerate the things that really happen in service

Some Challenges / Concerns

- Size
  - Length – we can test short lengths but we want to infer performance on long lengths
  - Big vs Small – we can test small cables but we want to infer performance on big cables
- Relevance
  - Success Criteria – how good an indicator of life is high ACBD values
  - Accelerating Factors – do the factors we use, accelerate the things that really happen in service
- Uncertainty in results used for design

Some Challenges / Concerns

- Size
  - Length – we can test short lengths but we want to infer performance on long lengths
  - Big vs Small – we can test small cables but we want to infer performance on big cables
- Relevance
  - Success Criteria – how good an indicator of life is high ACBD values
  - Accelerating Factors – do the factors we use, accelerate the things that really happen in service
- Uncertainty in results used for design

Aged Model Cable Tests

- Test Method
  - Voltage: 9 kV/50 Hz
  - Water: inside & outside
  - Inner temp: 85 °C
  - Outer temp: 70 °C
  - Ageing time: 1000 hours

- Evaluation
  - AC breakdown stress
  - Number of trees
  - Size of trees

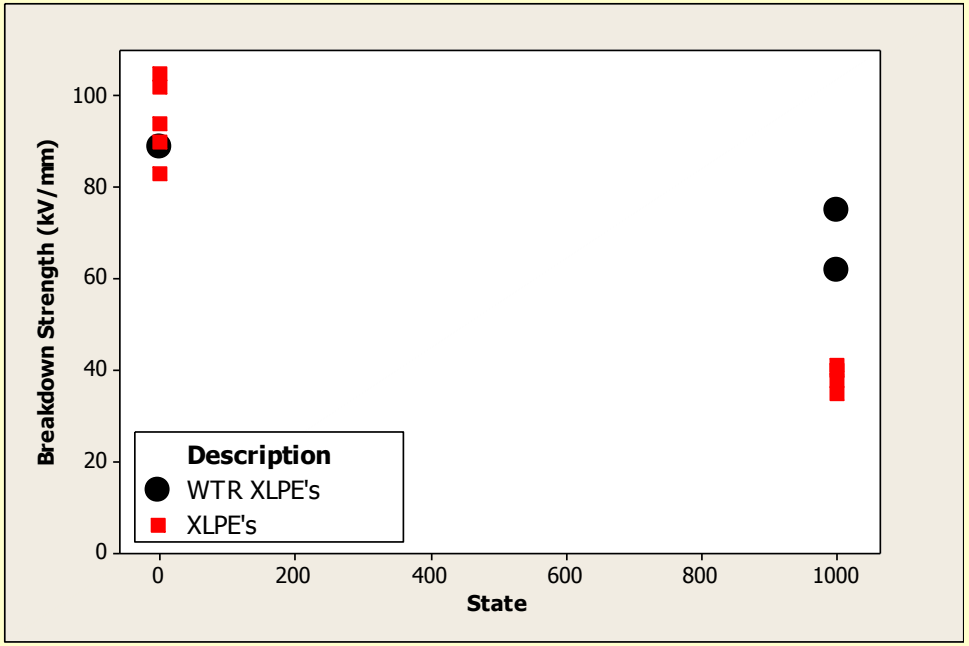

Hampton, Smedbery & Wald ISEI 2006

Aged Model Cable Data

1000h at 75/80C with 6kV/mm applied

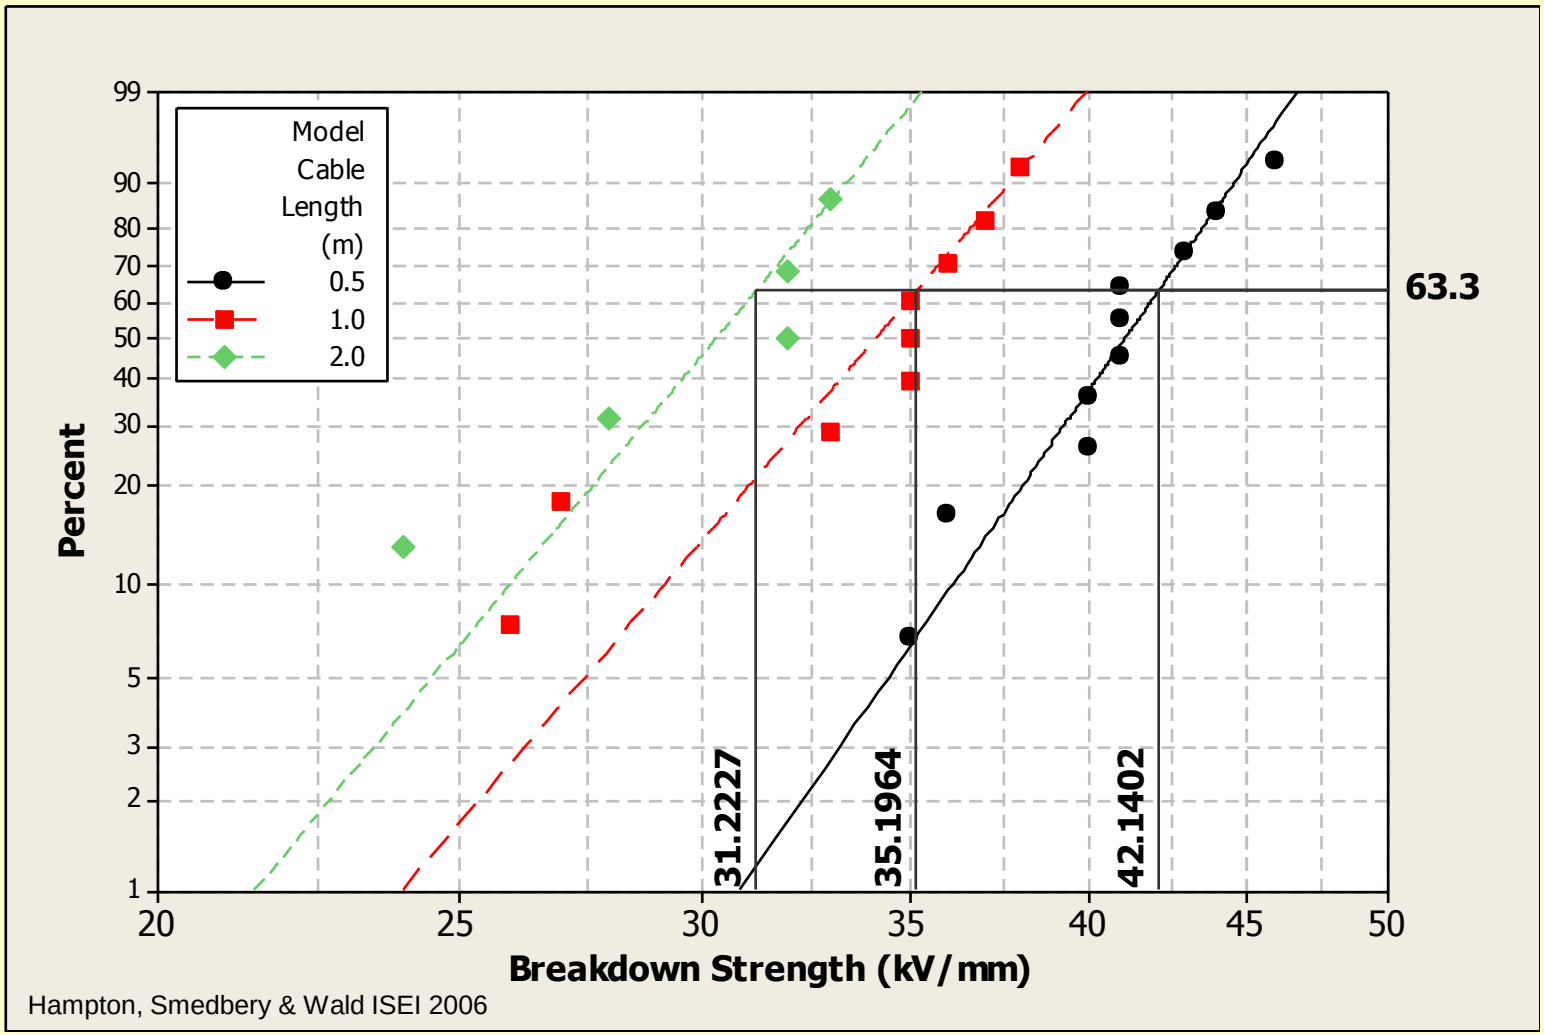

Min, Max & Mean Stresses

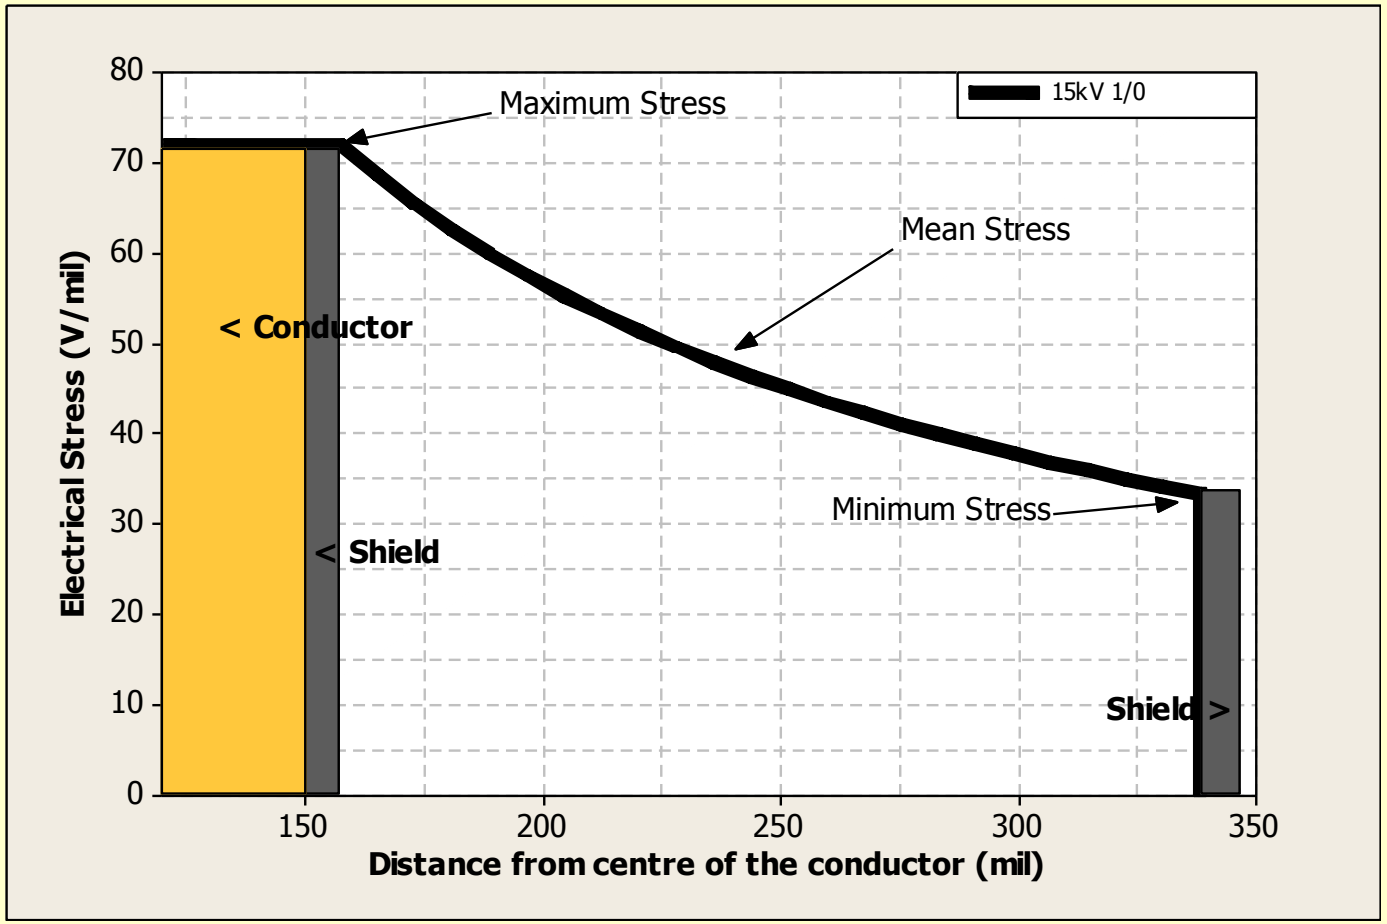

MV Stresses from AEIC / ICEA

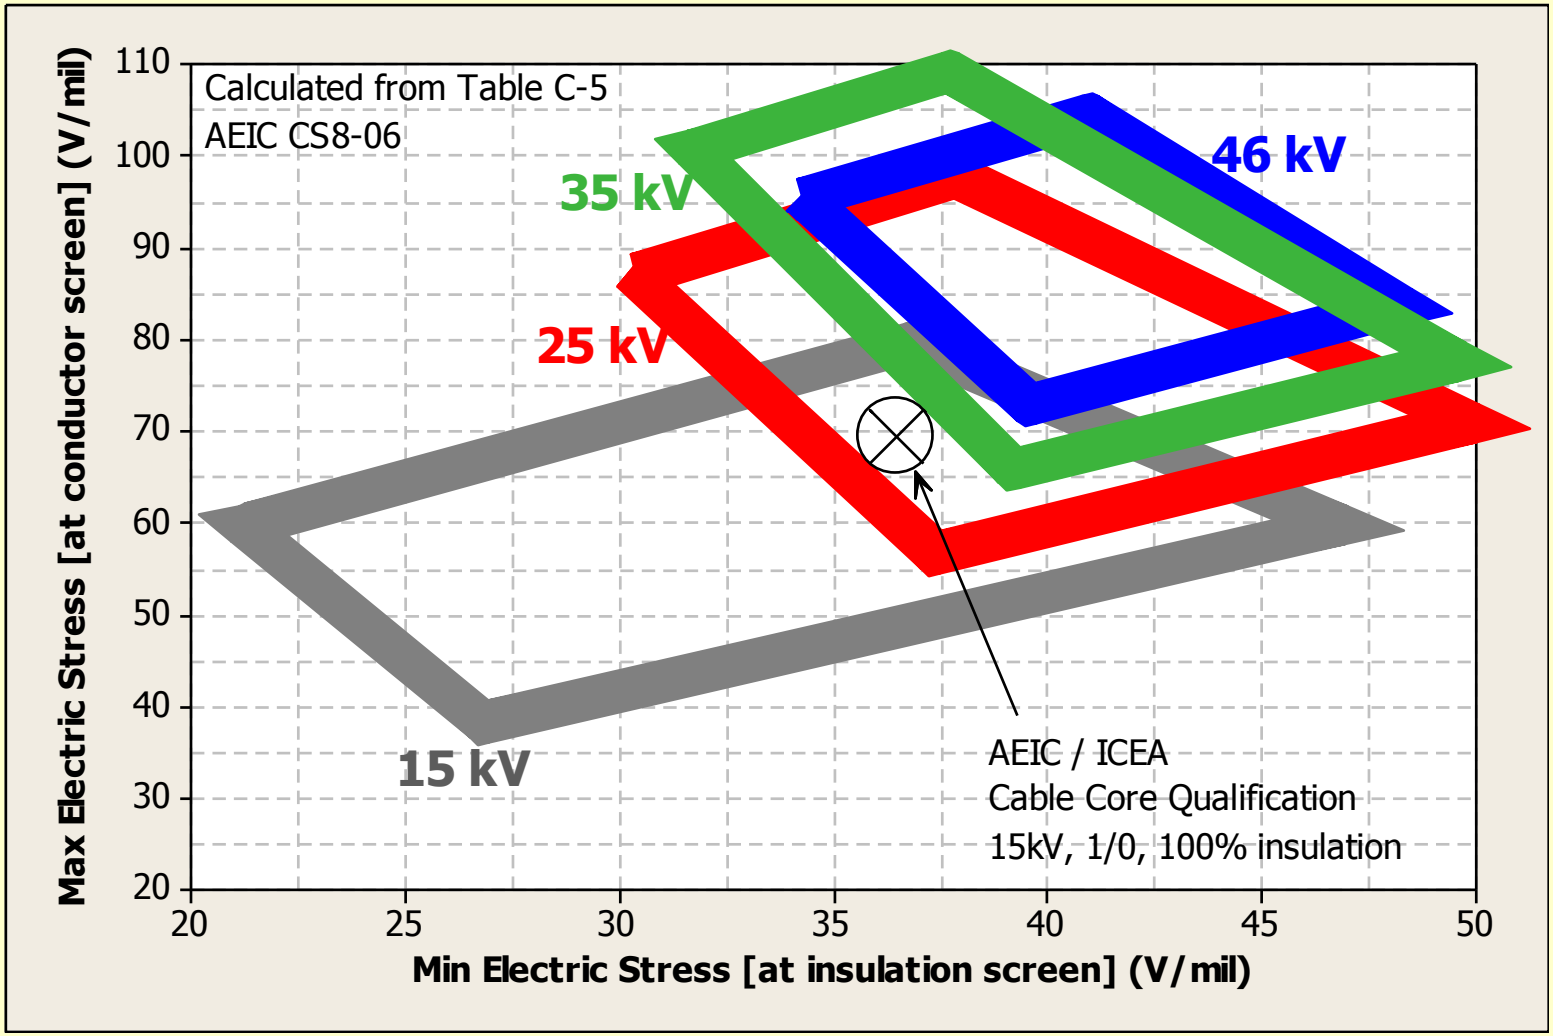

Some Challenges / Concerns

- Size
  - Length – we can test short lengths but we want to infer performance on long lengths
  - Big vs Small – we can test small cables but we want to infer performance on big cables
- Relevance
  - Success Criteria – how good an indicator of life is high ACBD values
  - Accelerating Factors – do the factors we use, accelerate the things that really happen in service
- Uncertainty in results used for design

Impact on HV design methods

$$E_{Design} = \frac{E_{Breakdown}}{K_{Thermal} K_{Age} K_{Safety}}$$

Breakdown Strength

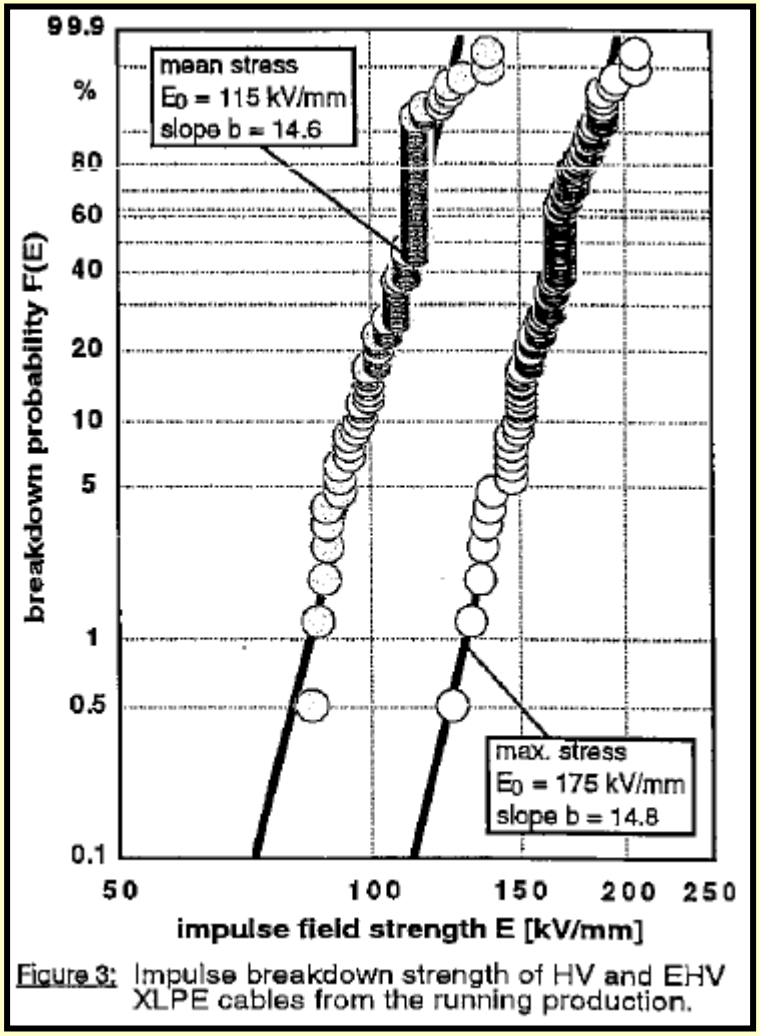

Figure 3: Impulse breakdown strength of HV and EHV XLPE cables from the running production.

Pesche Jicable 1995

Example - Uncertainty in Ageing Factor

$$k_1 = \sqrt[12]{\frac{30 \times 365 \times 24}{1}} = 2.83$$

n (@ 30 yrs)	k_1
13	2.6
12	2.8
11	3.6

Life (yrs) (@ n=12)	k_1
20	2.7
30	2.8
40	2.9

The 14.4mm estimate
could be as high 17mm or as low as 13mm

Some Challenges / Concerns

- Size
  - Length – we can test short lengths but we want to infer performance on long lengths
  - Big vs Small – we can test small cables but we want to infer performance on big cables
- Relevance
  - Success Criteria – how good an indicator of life is high ACBD values
  - Accelerating Factors – do the factors we use, accelerate the things that really happen in service
- Uncertainty in results used for design

Bathtub Reliability Curve

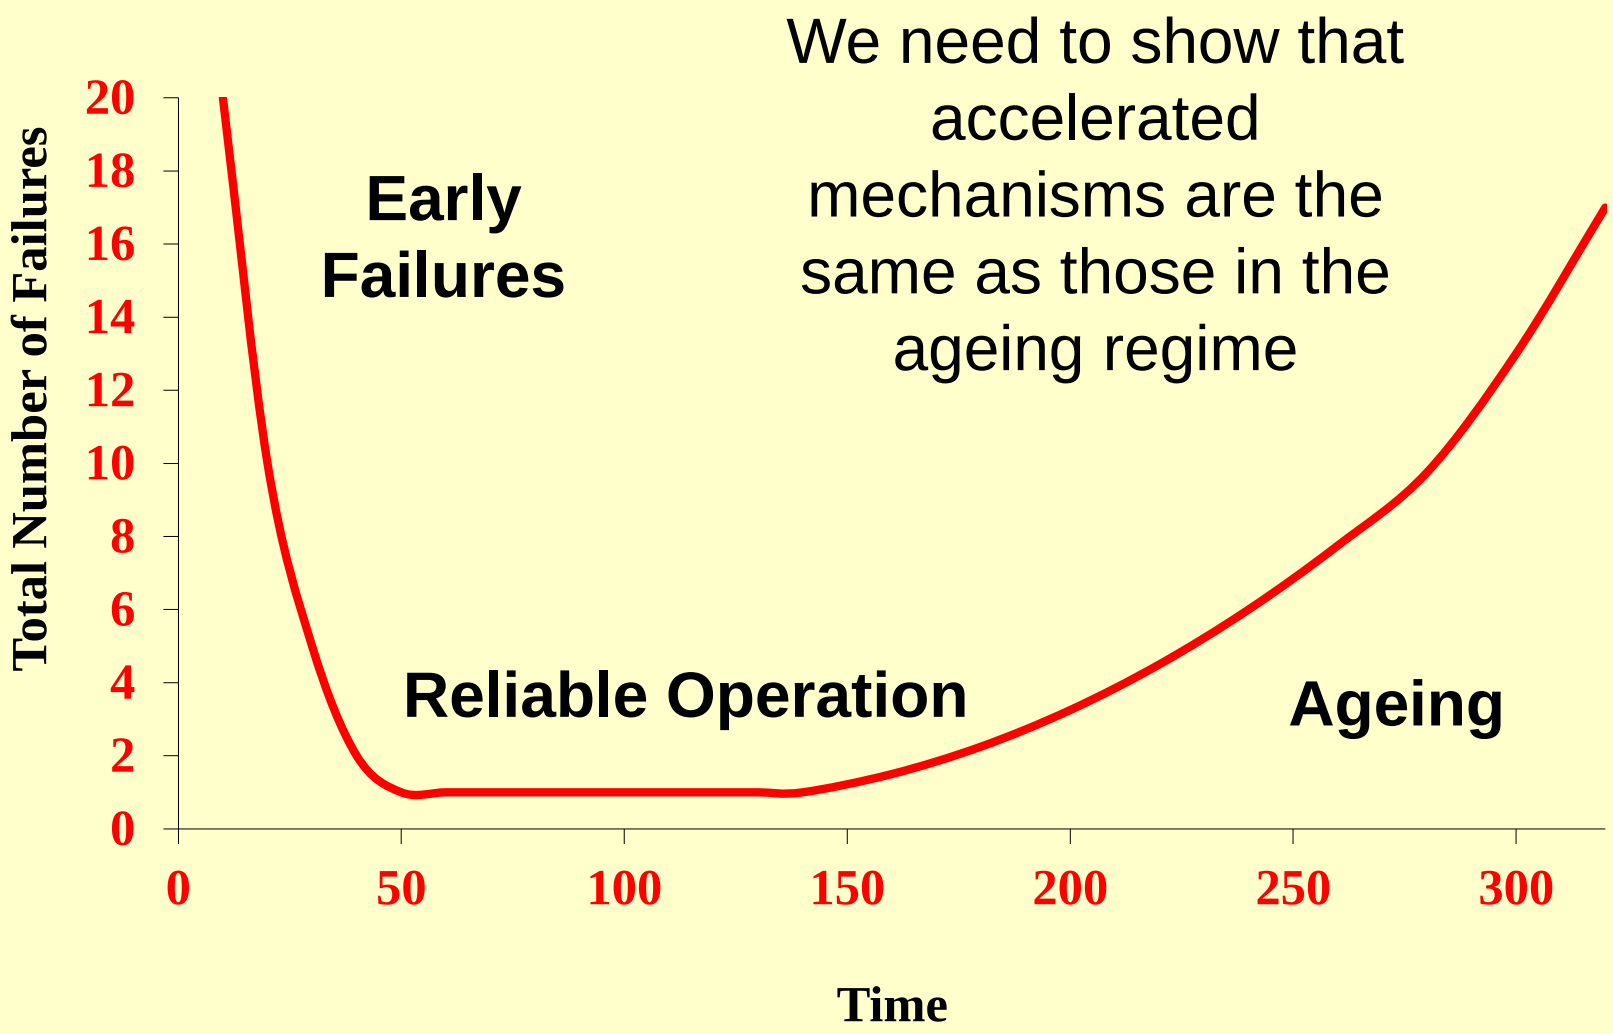

- We tend to track service failures as a lumped rate rather than a function of time

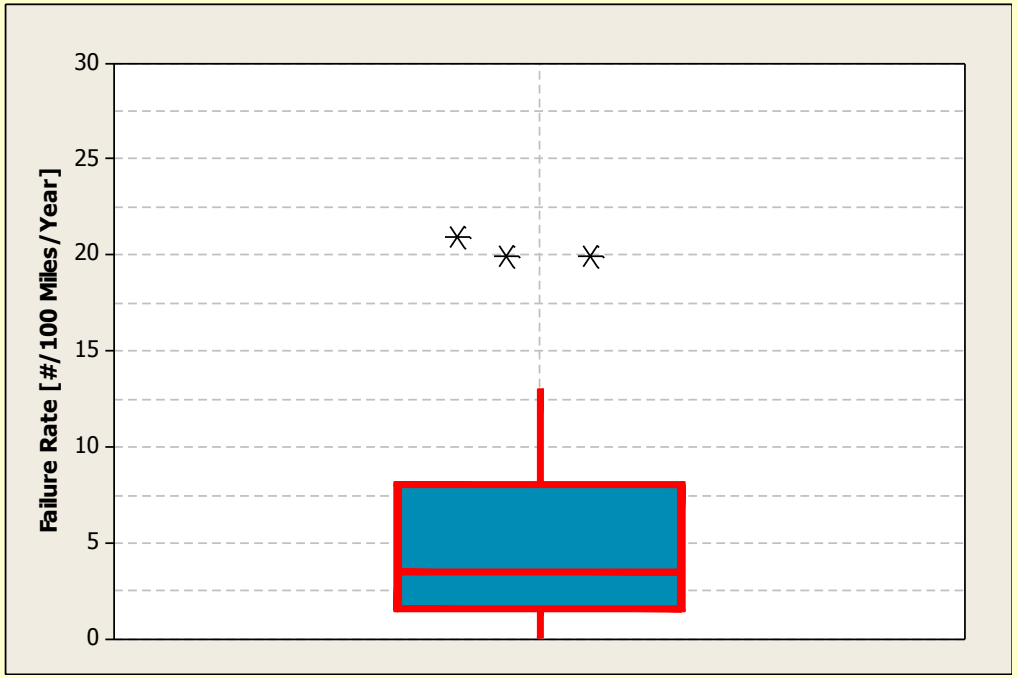

- ACLT results can potentially be related to service performance
- We define quality (AWTT, CENELEC) of accelerated tests by absolute breakdown strength & retained breakdown

MV Qualification – 2 year data

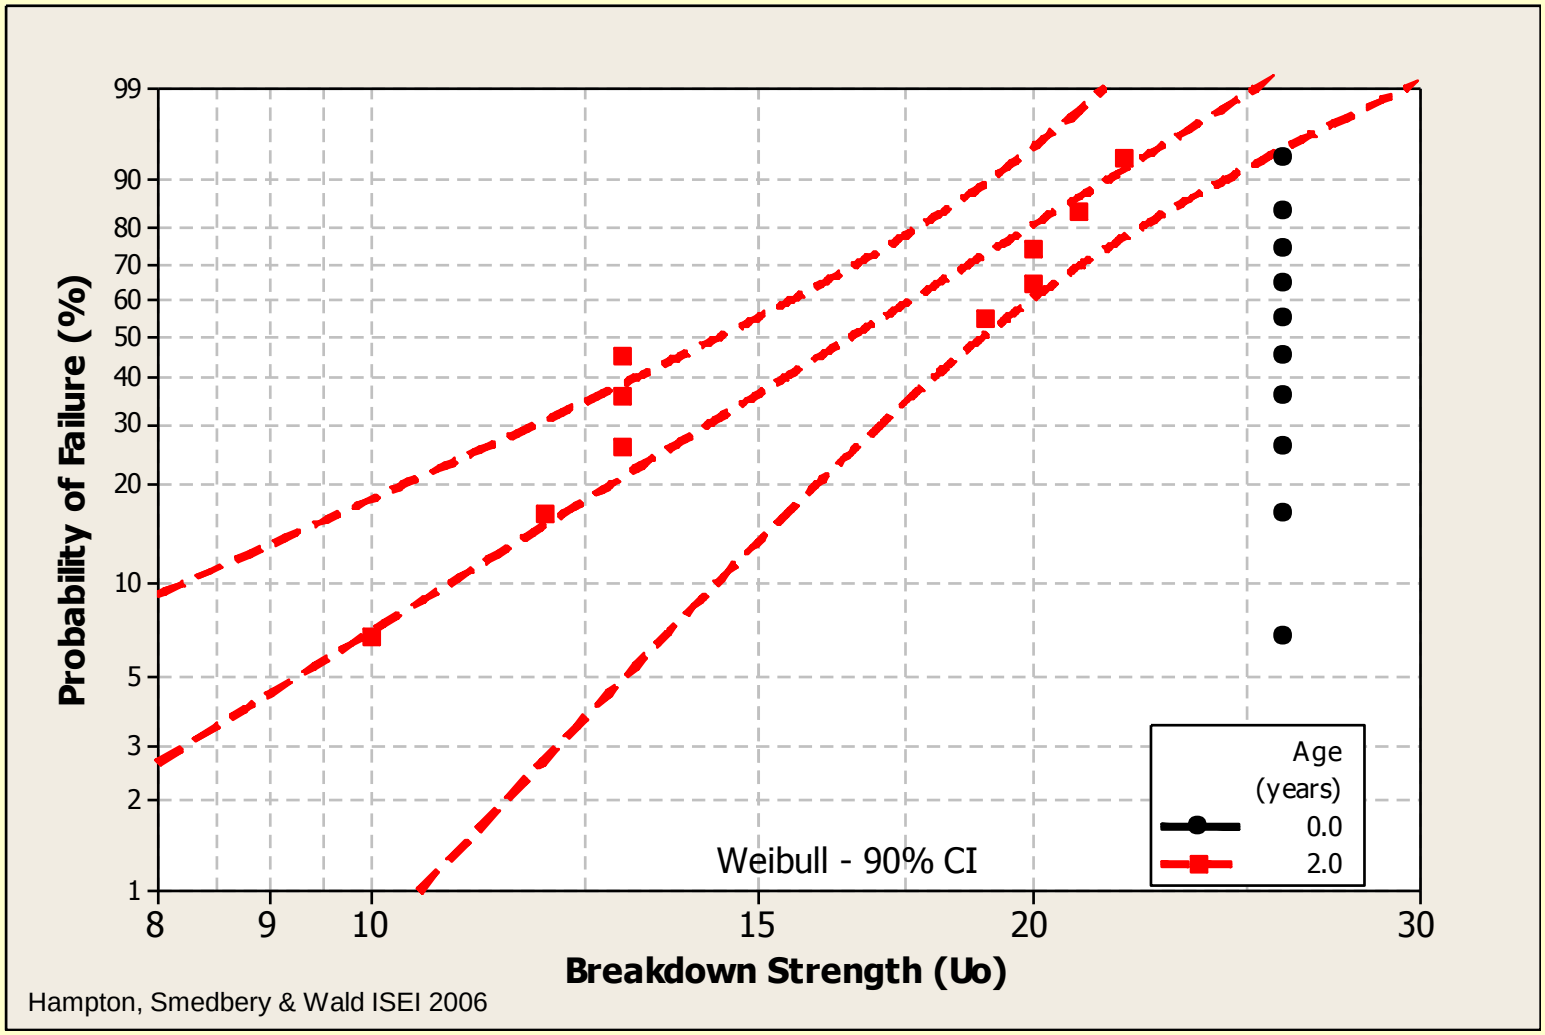

Qualification – adjustment

$$\alpha_{actual} = \alpha_{ref} \left(\frac{V_{ref}}{V_{actual}} \right)^{1/\beta}$$

Longer, Larger

Shorter, Smaller

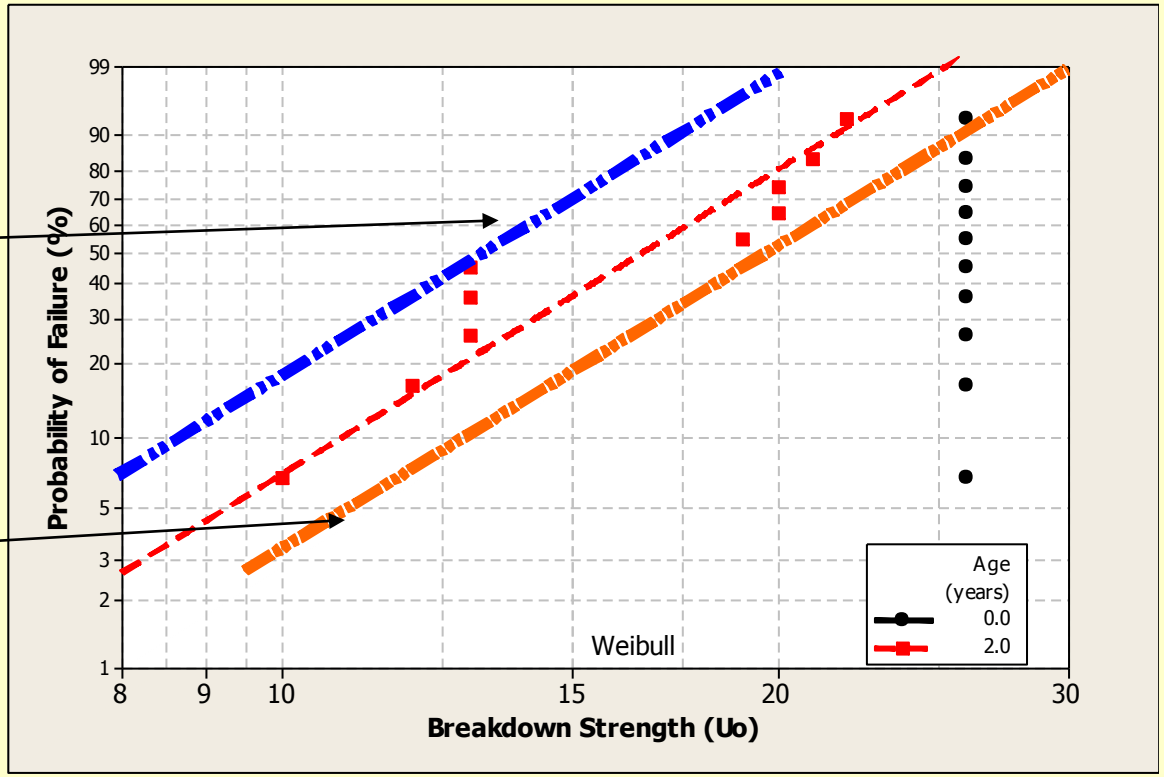

Hampton, Smedbery & Wald ISEI 2006

How does length change things

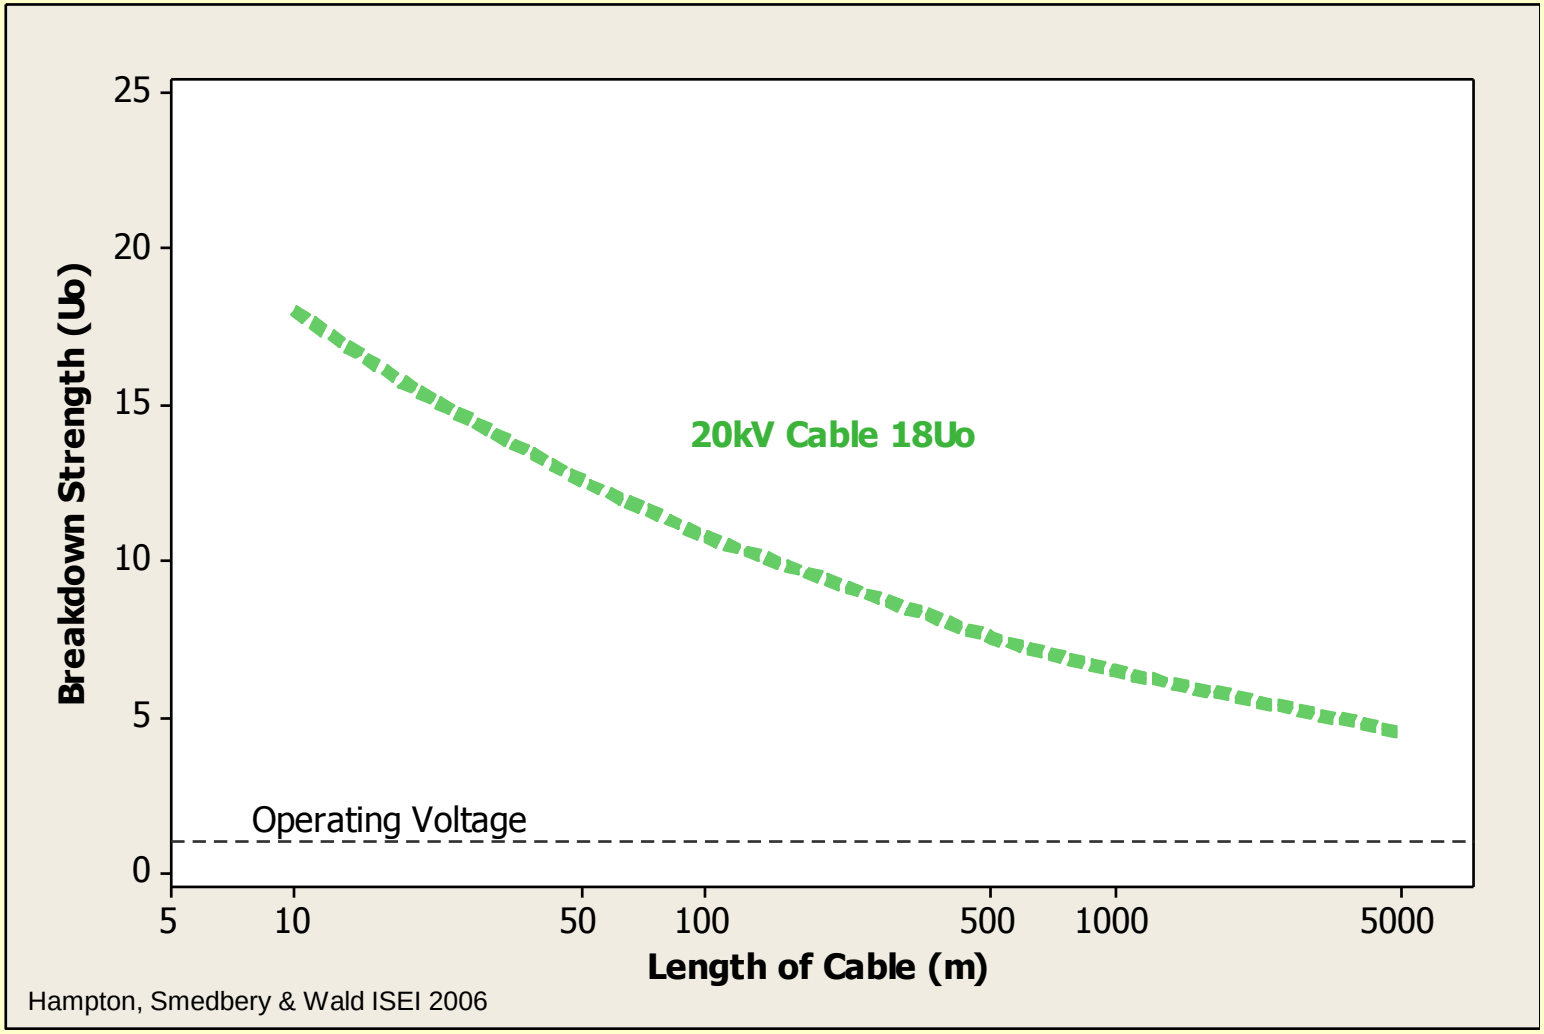

What if only have the min req

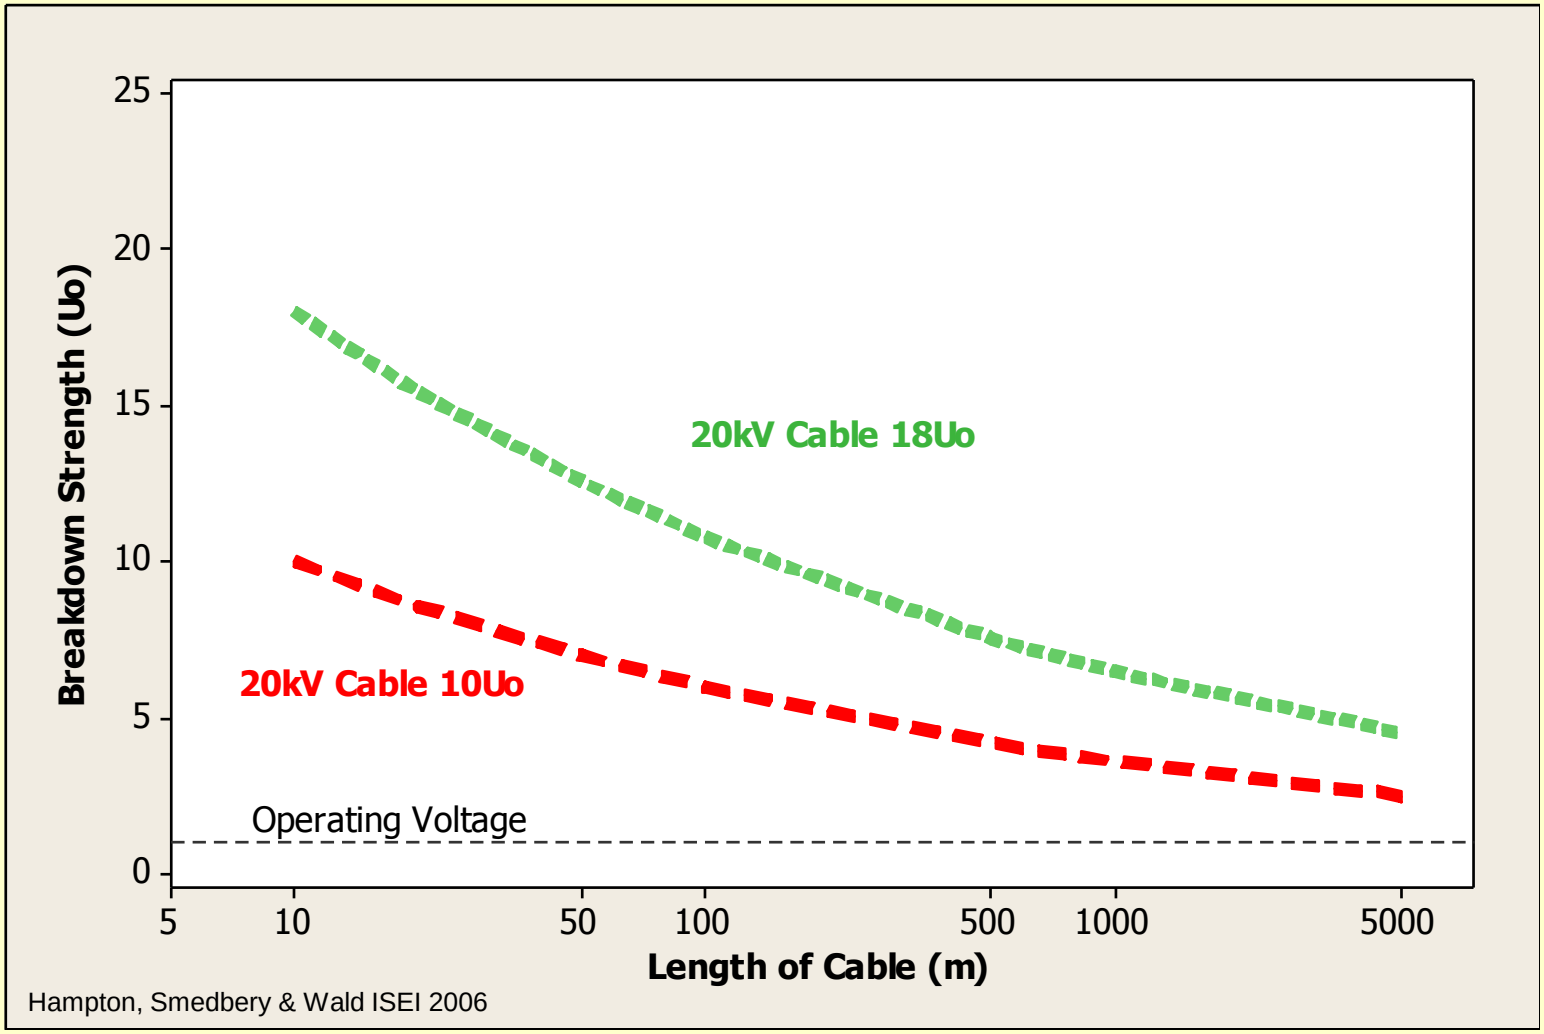

What if we qualified a small cable

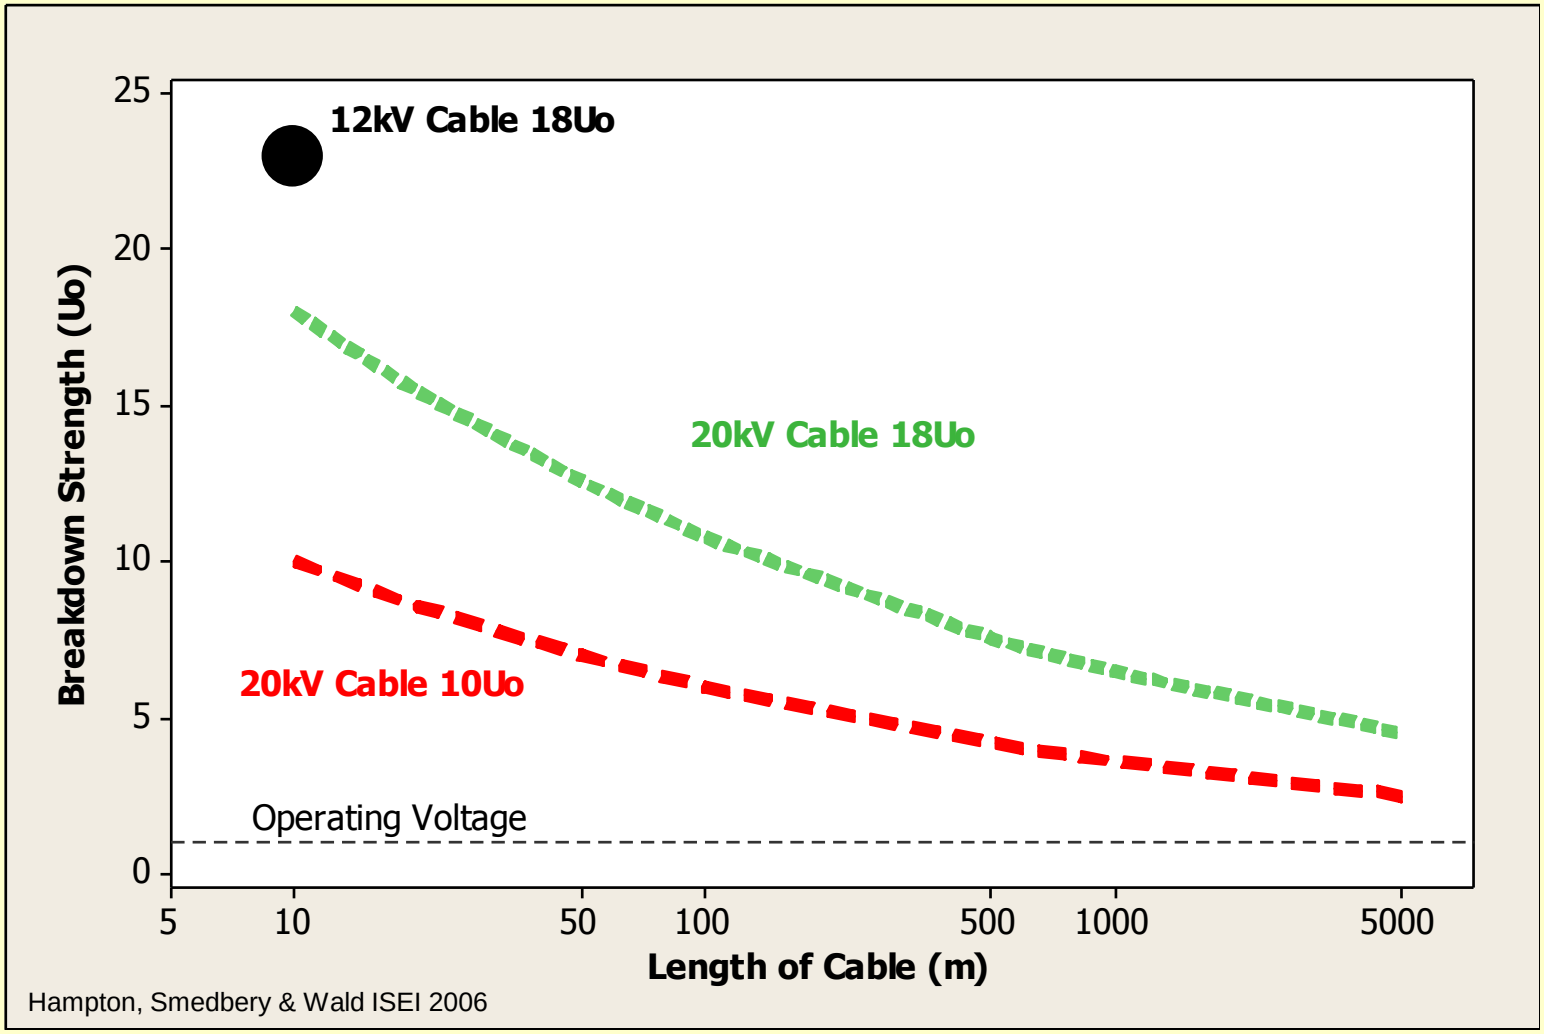

Conclusions

- Data from existing protocols are useful
- Data need to be handled carefully

Open Issues

- How do both test and service data get considered
- How are accessory interactions included
- How does the full test experience get included

Thank You